


123456

A

B

C

D

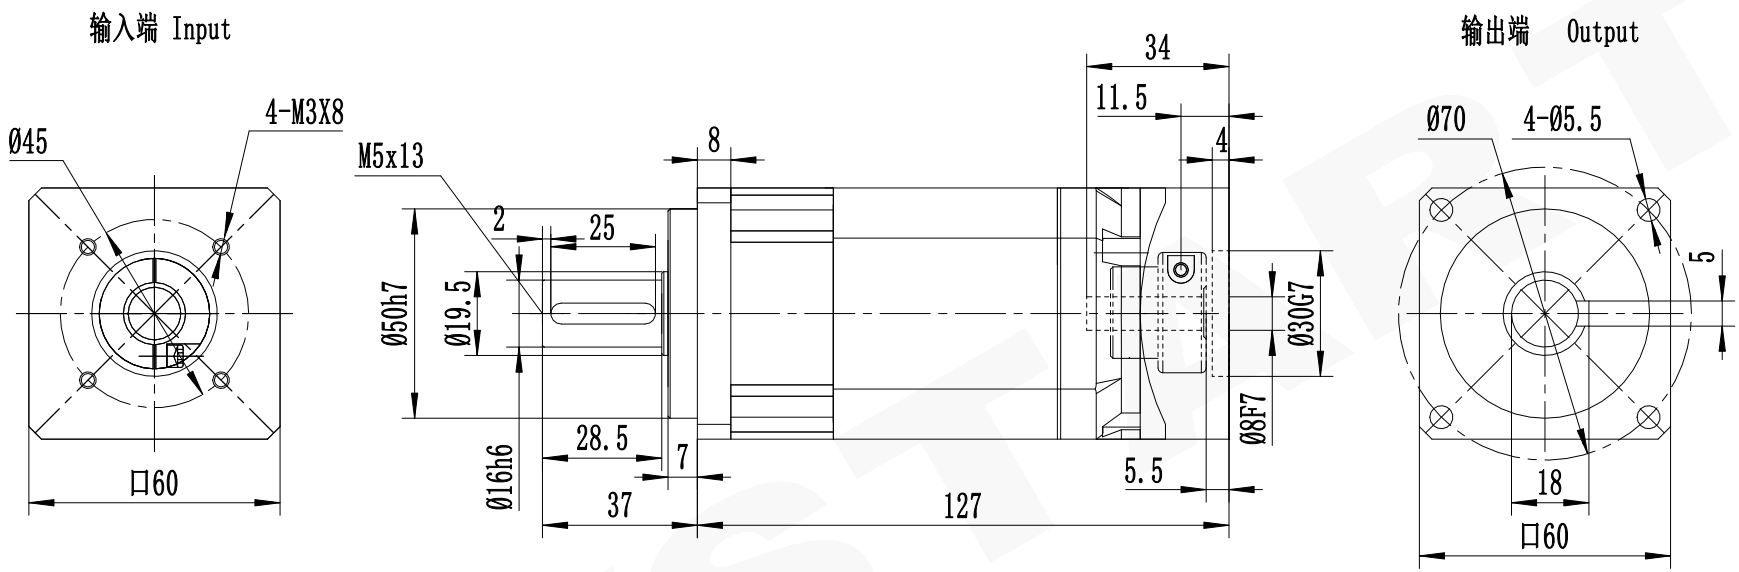

A

B

C

D

减速比 (Ratio i)	i 推荐	60/64/80/100/120/160/200		未注线性尺寸极限偏差 Unmarked tolerance	
	i 不推荐	256/320	512		
额定承载扭矩 (Rated load torque)	Nm	65	45	0.5-3	±0.2
最大加速力矩 (Max. acceleration torque)	Nm	117	81	3-6	±0.3
急停扭矩 (Emergency stop torque)	Nm	195	135	6-30	±0.5
*备注三级减速机需与厂家沟通				30-120	±0.8
精密行星减速机技术参数				120-400	±1.2
容许最大径向载荷 (Max. radial load)	1500N	空载力矩20℃ (No-load torque)	≤ 0.1Nm	400-1000	±2
容许最大轴向载荷 (Max. axial load)	760N	润滑 (Lubrication)	合成润滑油 (Synthetic grease)	精密行星减速机 Precision Planetary Gear Boxes	
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃		
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)	≥20000h	NEWSTART 纽氏连特	
噪音 (Noise)	≤ 60db	防护等级 (Protection grade)	IP54		
回程间隙 (Backlash)	9arcmin	AB系列	Tel/电话: 0533-6288333 6288444	A. AB. 060.	
		P2 L3	Fax/传真: 0533-6288411		
			Web/网址: www.newstart.cn		

123456