

1

2

3

4

5




6

A

B

C


D

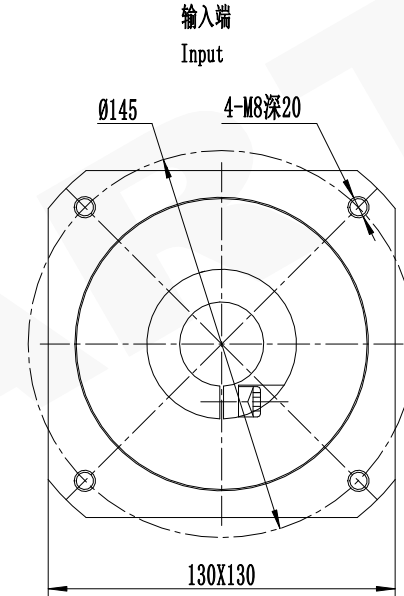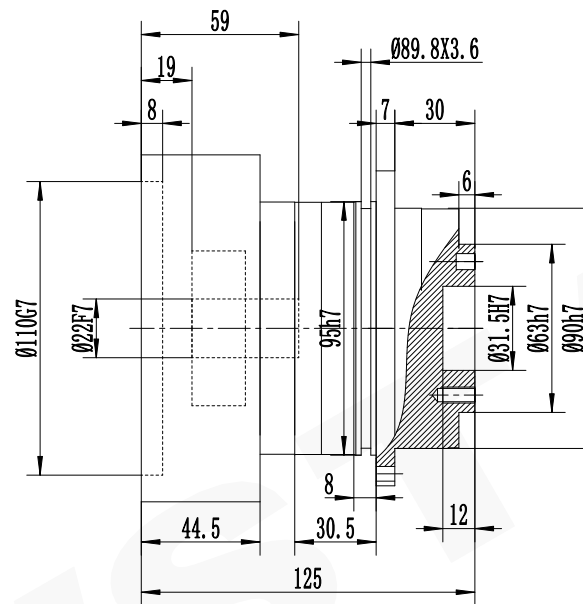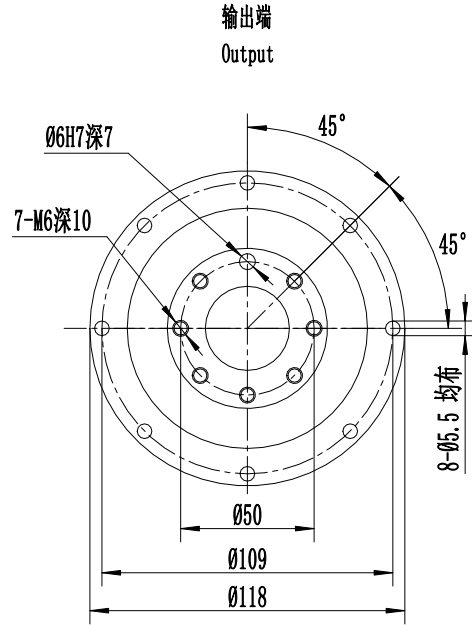

减速比 (Ratio i)		4	5	6	7	8	9	10
额定承载扭矩 (Rated load torque)	Nm	165	160	145	135	115	105	105
最大加速扭矩 (Max. acceleration torque)	Nm	297	288	261	243	207	189	189
急停扭矩 (Emergency stop torque)	Nm	495	480	435	405	345	315	315

未注线性尺寸极限偏差 Unmarked tolerance	
0.5-3	±0.2
3-6	±0.3
6-30	±0.5
30-120	±0.8
120-400	±1.2
400-1000	±2

精密行星减速机技术参数			
容许最大径向载荷 (Max. radial load)	4500N	空载力矩20℃ (No-load torque)	≤ 0.2Nm
容许最大轴向载荷 (Max. axial load)	3500N	润滑 (Lubrication)	合成润滑脂 (Synthetic grease)
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)	-15℃~+90℃
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)	≥20000h
噪音 (Noise)	≤ 60db	防护等级 (Protection grade)	IP54
回程间隙 (Backlash)	5arcmin	AD系列	Tel/电话: 0533-6288333 6288444
		P2 L1	Fax/传真: 0533-6288411
			Web/网址: www.newstart.cn

精密行星减速机 Precision Planetary Gear Boxes

AD090L1-i-P2-0P2 22-58-110-145-M8
A. AD. 090.

1

2

3

4

5

6

A

B

C

D