

A

B

C




D

A

B

C


D

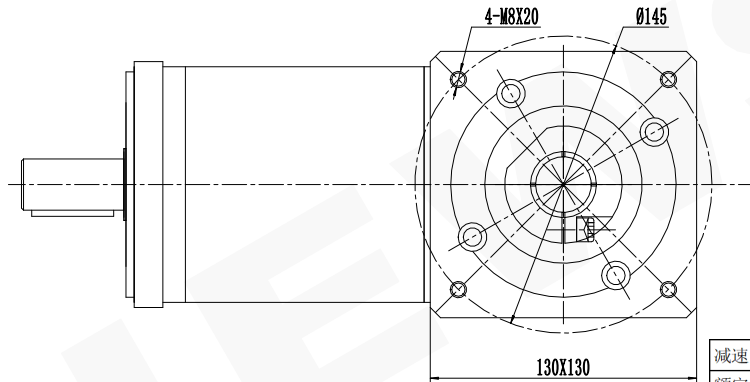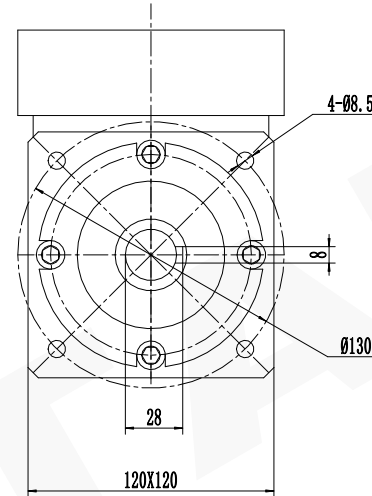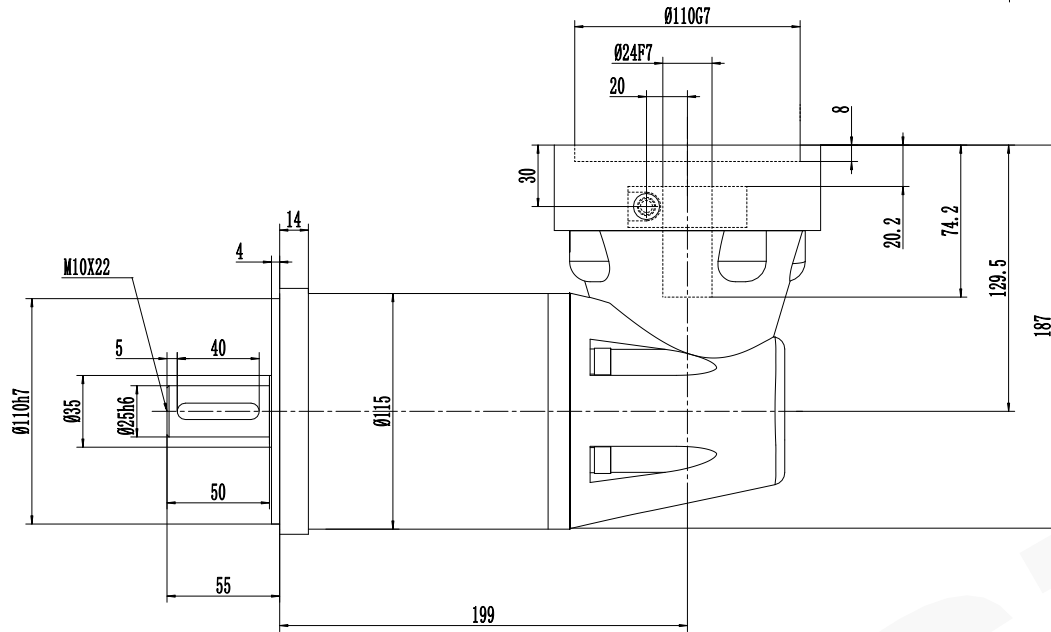

减速比 (Ratio i)	60/64/80/160/256	100/120/200/320	512
额定承载扭矩 (Rated load torque) Nm	260	230	120
最大加速力矩 (Max.acceleration torque) Nm	468	414	216
急停扭矩 (Emergency stop torque) Nm	780	690	360

未注线性尺寸极限偏差 Unmarked tolerance	
0.5-3	± 0.2
3-6	± 0.3
6-30	± 0.5
30-120	± 0.8
120-400	± 1.2
400-1000	± 2

精密行星减速机技术参数			
容许最大径向载荷 (Max.radial load)	900N	空载力矩20℃ (No-load torque)	$\leq 0.36Nm$
容许最大轴向载荷 (Max.axial load)	1200N	润滑 (Lubrication)	合成润滑油 (Synthetic grease)
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)	$-15^{\circ}C \sim +90^{\circ}C$
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)	$\geq 20000h$
噪音 (Noise)	$\leq 68db$	防护等级 (Protection grade)	IP54
回程间隙 (Backlash)	18arcmin	PL系列	Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn
		P2 L3	

精密行星减速机 Precision Planetary Gear Boxes

WPF115L3-i-P2-S2 22-58-110-145-M8
A. WPF. 115.