

1

2

3




4


5

6

输出端  
Output

输入端  
Input

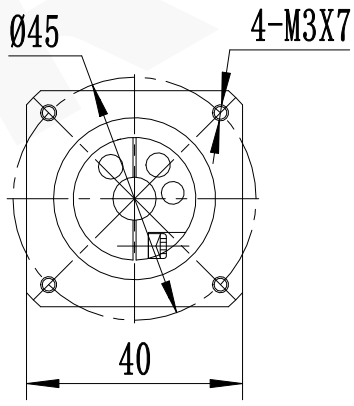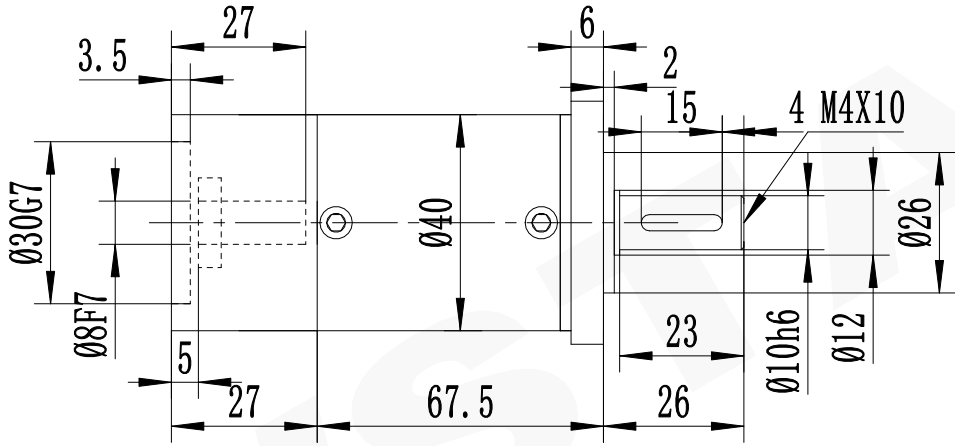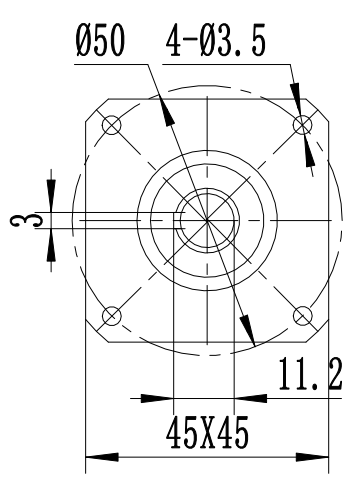

减速比 (Ratio i)		60/64/80/160/256	100/120/200/320	512	6-30	±0.5
额定承载扭矩 (Rated load torque) Nm		20	18	5	30-120	±0.8
最大加速力矩 (Max. acceleration torque) Nm		36	32.4	9	120-400	±1.2
急停扭矩 (Emergency stop toque) Nm		60	54	15	400-1000	±2
精密行星减速机技术参数					精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max. radial load)	220N	空载力矩20℃ (No-load torque)		≤ 0.05Nm		PF040L3-i-P2-S2 8-25-30-45-M3
容许最大轴向载荷 (Max. axial load)	200N	润滑 (Lubrication)		合成润滑油 (Synthetic grease)		
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)		-15℃ +90℃		
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)		≥20000h		
噪音 (Noise)	≤ 58db	防护等级 (Protection grade)		IP54		
回程间隙 (Backlash)	20arcmin	PL 系列		Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn	A. PF. 040.	
		P2 L3				

未注线性尺寸极限偏差 Unmarked tolerance	
0.5-3	±0.2
3-6	±0.3
6-30	±0.5
30-120	±0.8
120-400	±1.2
400-1000	±2

1

2

3

4

5

6