

123456



A

B


C

D

输出端 Output

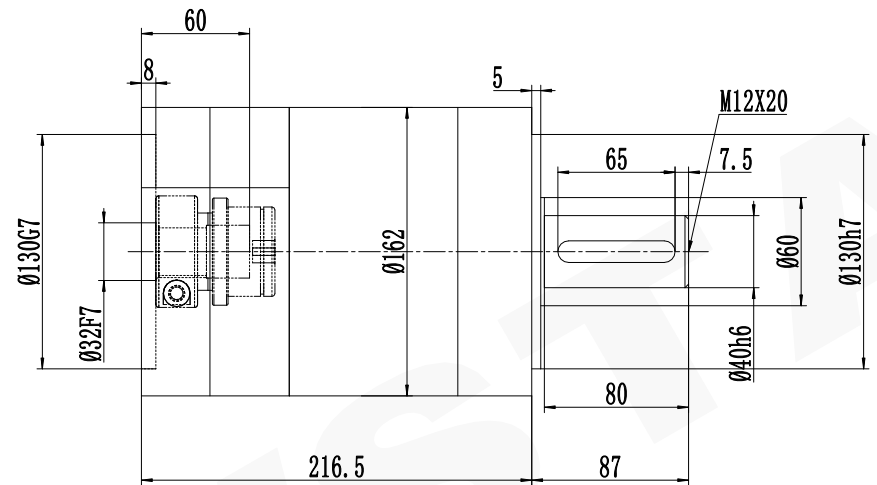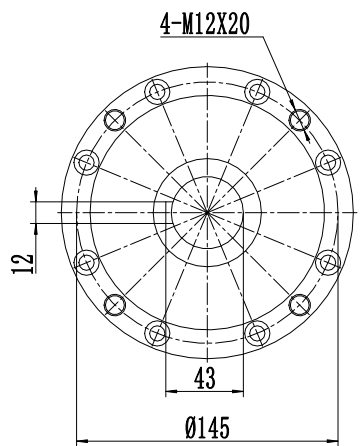

输入端 Input

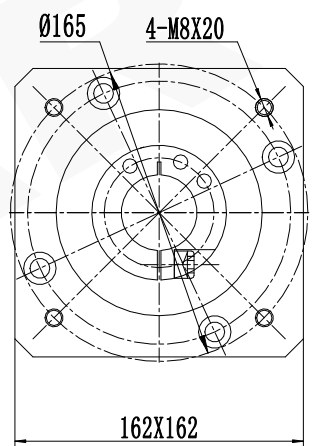

A

B

C

D

|                                      |      |             |                |       |  |  |  |  |                                  |
|--------------------------------------|------|-------------|----------------|-------|--|--|--|--|----------------------------------|
| 减速比 (Ratio i)                        | 9    | 12/16/20/32 | 15/40/25/50/30 | 64/80 |  |  |  |  | 未注线性尺寸极限偏差<br>Unmarked tolerance |
| 额定承载扭矩 (Rated load torque) Nm        | 400  | 800         | 700            | 450   |  |  |  |  | 0.5-3 ±0.2                       |
| 最大加速力矩 (Max. acceleration torque) Nm | 720  | 1440        | 1260           | 810   |  |  |  |  | 3-6 ±0.3                         |
| 急停扭矩 (Emergency stop torque) Nm      | 1200 | 2400        | 2100           | 1350  |  |  |  |  | 6-30 ±0.5                        |
|                                      |      |             |                |       |  |  |  |  | 30-120 ±0.8                      |
|                                      |      |             |                |       |  |  |  |  | 120-400 ±1.2                     |
|                                      |      |             |                |       |  |  |  |  | 400-1000 ±2                      |

| 精密行星减速机技术参数                  |           |                               |  |   | 精密行星减速机                             |  |
|------------------------------|-----------|-------------------------------|--|---|-------------------------------------|--|
| 容许最大径向载荷 (Max. radial load)  | 3600N     | 空载力矩20℃(No-load torque)       |  | ≤ 0.72Nm  |                                     |  |
| 容许最大轴向载荷 (Max. axial load)   | 8000N     | 润滑(Lubrication)               |  | 合成润滑脂 (Synthetic grease)  |                                     |  |
| 额定输入转速 (Nominal input speed) | 2000r/min | 使用环境温度(Operation temperature) |  | -15℃~+90℃   |                                     |  |
| 最大输入转速 (Max input speed)     | 4000r/min | 使用寿命(Service life)            |  | ≥20000h   |                                     |  |
| 噪音 (Noise)                   | ≤ 65db    | 防护等级(Protection grade)        |  | IP54  |                                     |  |
| 回程间隙 (Backlash)              | 12arcmin  | PL 系列                         |  | Tel/电话: 0533-6288333 6288444<br>Fax/传真: 0533-6288411<br>Web/网址: www.newstart.cn |                                     |  |
|                              |           | P2 L2                         |  |   |                                     |  |
|                              |           |                               |  |   | PL160L2-i-P2-S2<br>32-58-130-165-M8 |  |
|                              |           |                               |  |   | A. PL. 160.                         |  |

123456