

1

2

3

4

5


6


A

B

C

D

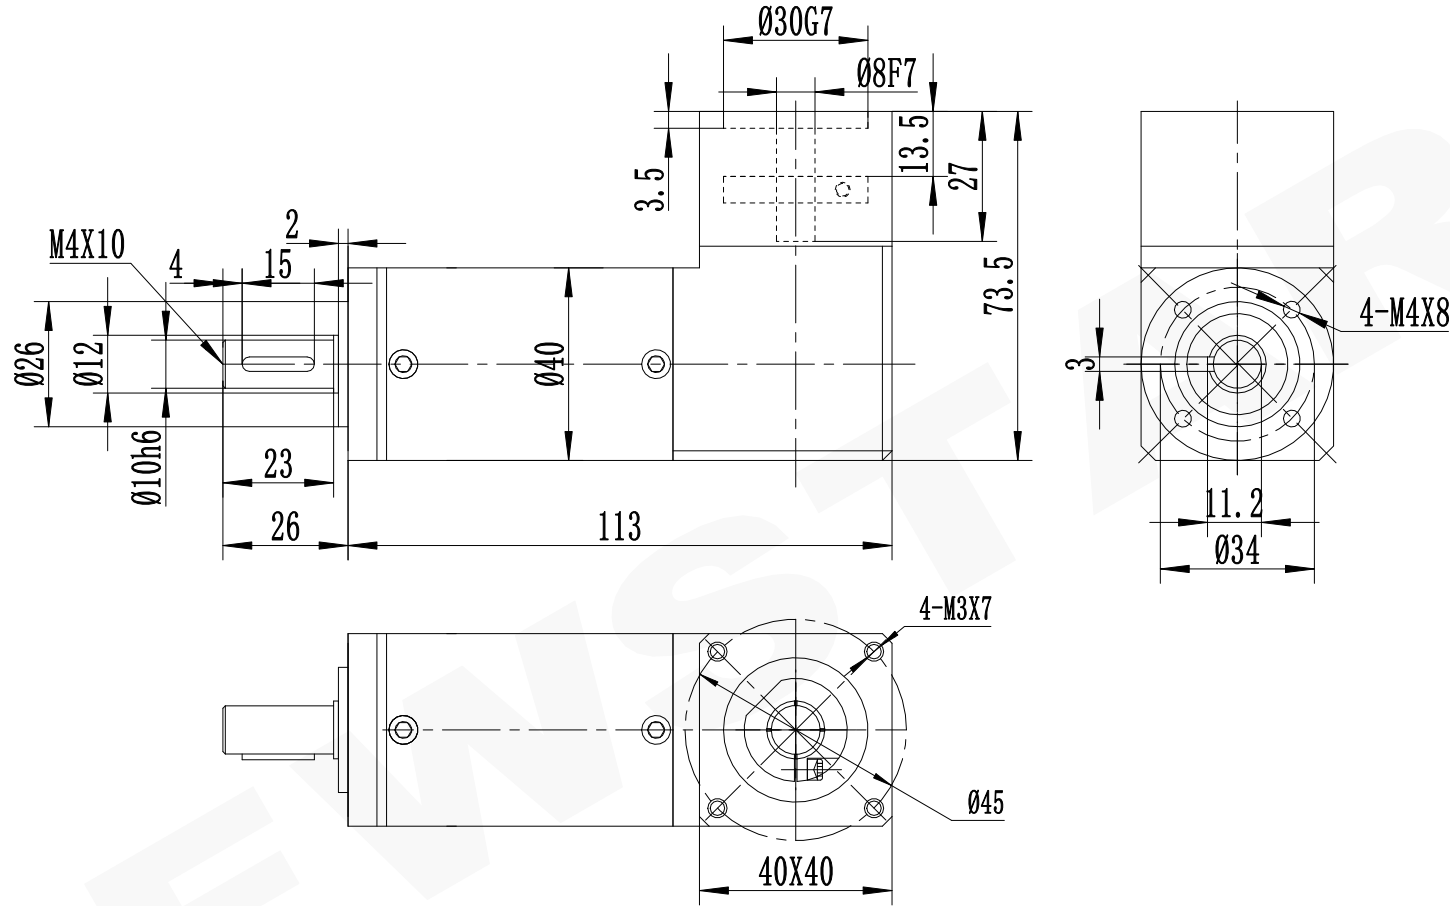

减速比 (Ratio i)		60/64/80/160/256	100/120/200/320	512	6-30	±0.5	
额定承载扭矩 (Rated load torque)		Nm	20	18	5	30-120	±0.8
最大加速力矩 (Max.acceleration torque)		Nm	36	32.4	9	120-400	±1.2
急停扭矩 (Emergency stop toque)		Nm	60	54	15	400-1000	±2
精密行星减速机技术参数						精密行星减速机	
容许最大径向载荷 (Max.radial load)		220N	空载力矩20℃ (No-load torque)		≤ 0.05Nm		 紐氏達特
容许最大轴向载荷 (Max.axial load)		200N	润滑 (Lubrication)		合成润滑脂 (Synthetic grease)		
额定输入转速 (Nominal input speed)		3000r/min	使用环境温度 (operation temperature)		-15℃~+90℃		
最大输入转速 (Max input speed)		6000r/min	使用寿命 (Service life)		≥20000h		
噪音 (Noise)		≤ 60db	防护等级 (Protection grade)		IP54		WPL040L3-i-P2-S2 8-25-30-45-M3
回程间隙 (Backlash)		22arcmin	WPL系列		Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn		
			P2 L3				
						A. WPL. 040.	

1

2

3

4

5

6

A

B

C

D