

1

2



3

4


5

6

输出端  
OutPut

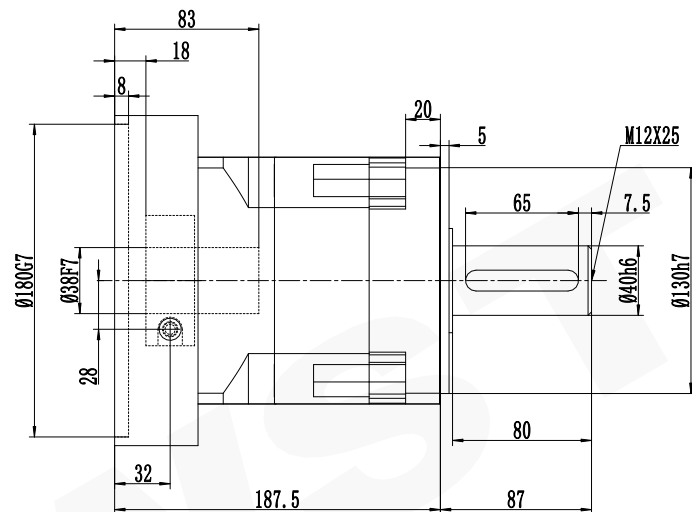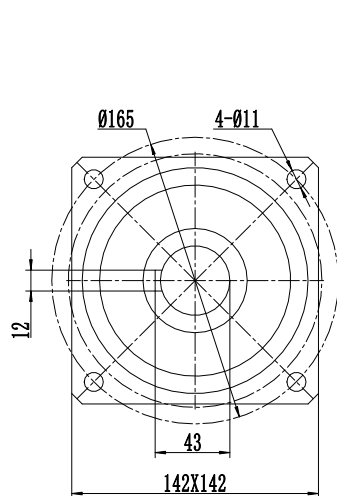

输入端  
InPut

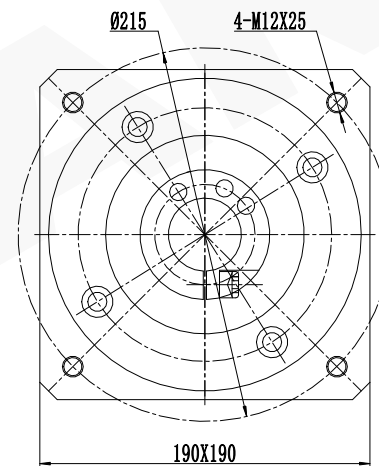

减速比 (Ratio i)		3	4	5	6	8	10		3-6	±0.3
额定承载扭矩 (Rated load torque)	Nm	743	1780	1153	820	800	710		6-30	±0.5
最大加速力矩 (Max. acceleration torque)	Nm	1337	3204	2075	1476	1440	1278		30-120	±0.8
急停扭矩 (Emergency stop torque)	Nm	2229	5340	3459	2460	2400	2130		120-400	±1.2
									400-1000	±2
精密行星减速机技术参数									精密行星减速机 Precision Planetary Gear Boxes	
容许最大径向载荷 (Max. radial load)	18000N	空载力矩20℃ (No-load torque)				≤ 1.5Nm			 NEWSTART® 纽氏达特	PS190L1-i-P2-S2 38-80-180-215-M12
容许最大轴向载荷 (Max. axial load)	28000N	润滑 (Lubrication)				合成润滑油 (Synthetic grease)				
额定输入转速 (Nominal input speed)	1500r/min	使用环境温度 (Operation temperature)				-15℃~+90℃				
最大输入转速 (Max input speed)	3000r/min	使用寿命 (Service life)				≥20000h			A. PS.      190.	
噪音 (Noise)	≤ 72db	防护等级 (Protection grade)				IP54				
回程间隙 (Backlash)	8arcmin	PS系列				Tel/电话: 0533-6288333 6288444				
		P2 L1				Fax/传真: 0533-6288411				
						Web/网址: www.newstart.cn				