

1

2

3

4

5

6



A

B


C

D

输出端
OutPut

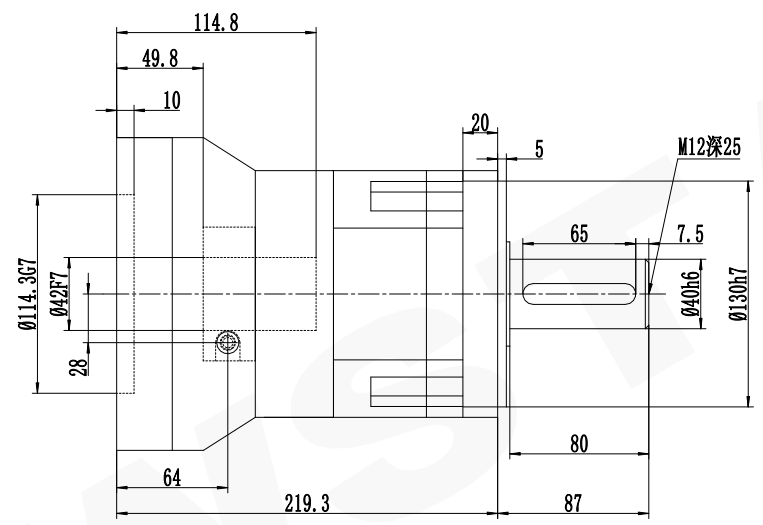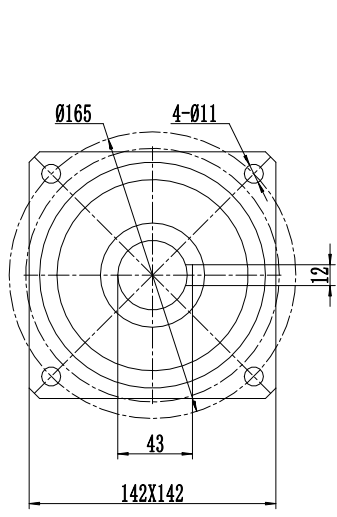

输入端
InPut

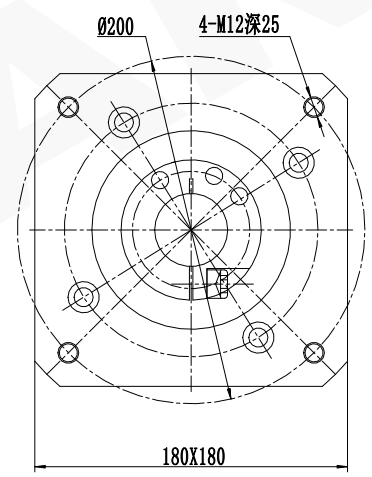

A

B

C

D

减速比 (Ratio i)		3	4	5	6	8	10	
额定承载扭矩 (Rated load torque)	Nm	743	1780	1153	820	800	710	
最大加速力矩 (Max. acceleration torque)	Nm	1337	3204	2075	1476	1440	1278	
急停扭矩 (Emergency stop torque)	Nm	2229	5340	3459	2460	2400	2130	
精密行星减速机技术参数								
容许最大径向载荷 (Max. radial load)	18000N	空载力矩20℃ (No-load torque)		≤ 1.5Nm				
容许最大轴向载荷 (Max. axial load)	28000N	润滑 (Lubrication)		合成润滑油 (Synthetic grease)				
额定输入转速 (Nominal input speed)	1500r/min	使用环境温度 (Operation temperature)		-15℃~+90℃				
最大输入转速 (Max input speed)	3000r/min	使用寿命 (Service life)		≥20000h				
噪音 (Noise)	≤ 72db	防护等级 (Protection grade)		IP54				
回程间隙 (Backlash)	8arcmin			PS系列		Tel/电话: 0533-6288333 6288444		
				P2 L1		Fax/传真: 0533-6288411		
						Web/网址: www.newstart.cn		

未注线性尺寸极限偏差 Unmarked tolerance	
0.5-3	±0.2
3-6	±0.3
6-30	±0.5
30-120	±0.8
120-400	±1.2
400-1000	±2
精密行星减速机 Precision Planetary Gear Boxes	
 纽氏達特	
PS190L1-i-P2-S2 42-113-114.3-200- M12	
A. PS.	190.

1

2

3

4

5

6