

1

2

3

4

5

6



A

B


C

D

输出端
OutPut

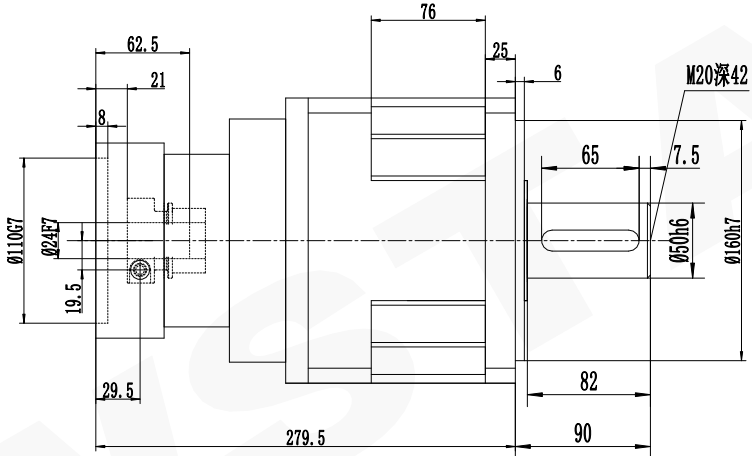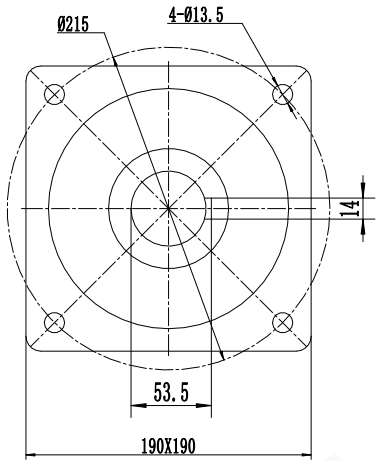

输入端
InPut

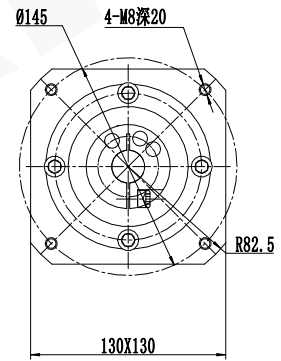


A

B

C

D

未注线性尺寸极限偏差 Unmarked tolerance				0.5-3	±0.2
				3-6	±0.3
				6-30	±0.5
				30-120	±0.8
				120-400	±1.2
				400-1000	±2
精密行星减速机技术参数				精密行星减速机 Precision Planetary Gear Boxes	
减速比 (Ratio i)	60/64/80/160/256	100/120/200/320	512	 PS190L3-i-P2-S2 24-58-110-145-M8	
额定承载扭矩 (Rated load torque)	Nm 1780	1153	800		
最大加速力矩 (Max.acceleration torque)	Nm 3204	2075.4	1440		
急停扭矩 (Emergency stop toque)	Nm 5340	3459	2400		
容许最大径向载荷 (Max.radial load)	18000N	空载力矩20℃ (No-load torque)	≤ 1.5Nm	A. PS. 190.	
容许最大轴向载荷 (Max.axial load)	28000N	润滑 (Lubrication)	合成润滑油 (Synthetic grease)		
额定输入转速 (Nominal input speed)	1500r/min	使用环境温度 (Operation temperature)	-15℃~+90℃		
最大输入转速 (Max input speed)	3000r/min	使用寿命 (Service life)	≥20000h		
噪音 (Noise)	≤ 72db	防护等级 (Protection grade)	IP54	Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn	
回程间隙 (Backlash)	12arcmin	PS系列			
		P2 L3			

1

2

3

4

5

6