

1

2

3

4

5




6

A

B

C

D

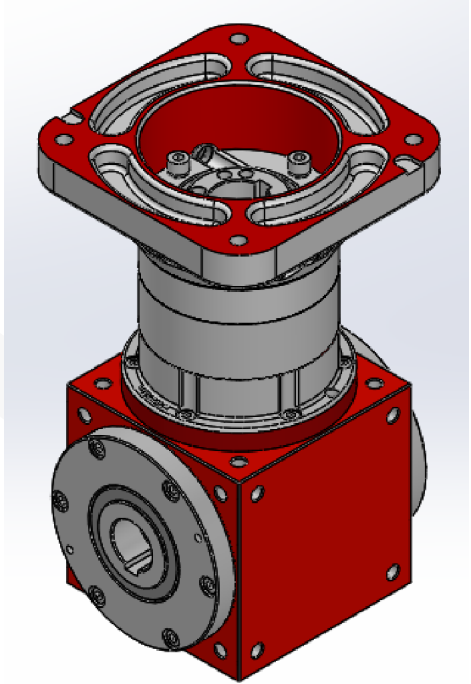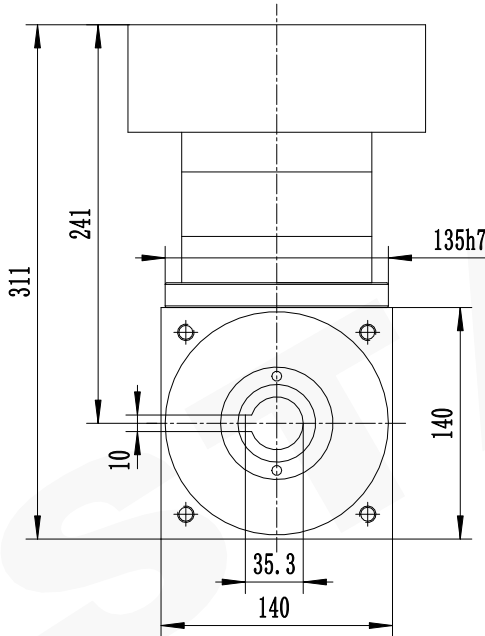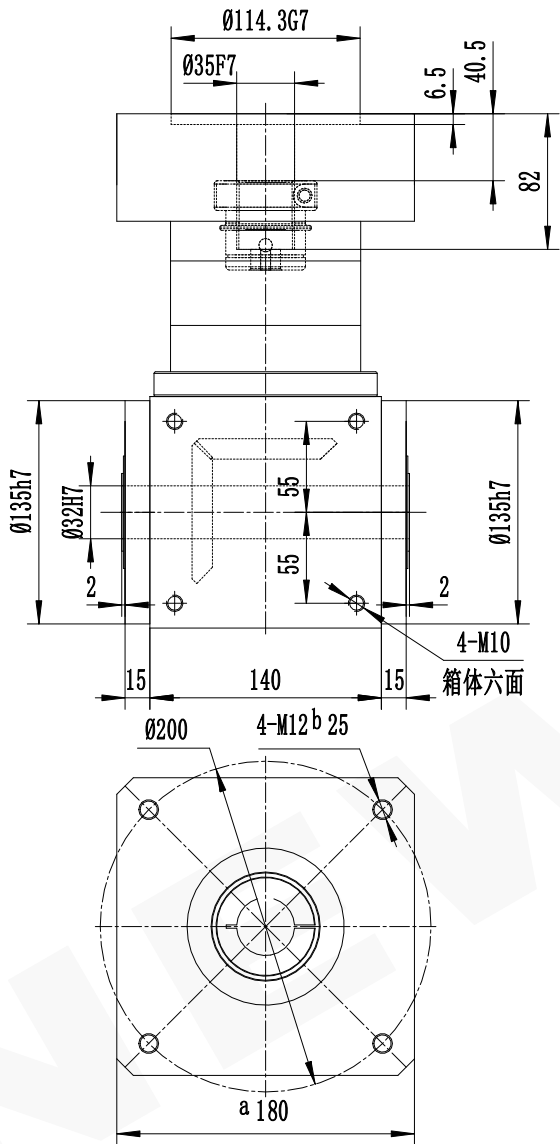

A

B

C

D

| | | | | | | | | |
|-----------------------------------|-------------|--------------------------------|------|------|---|------|-----|--|
| 减速比 (Ratio i) | | 3 | 4 | 5 | 6 | 8 | 10 | |
| 额定承载扭矩 (Rated load torque) | Nm | 360 | 360 | 360 | 360 | 360 | 330 | |
| 最大加速力矩 (Max. acceleration torque) | Nm | 540 | 540 | 540 | 540 | 540 | 495 | |
| 急停扭矩 (Emergency stop torque) | Nm | 1080 | 1080 | 1080 | 1080 | 1080 | 990 | |
| 精密行星减速机技术参数 | | | | | | | | |
| 容许最大径向载荷 (Max. radial load) | 2700N | 空载力矩20℃ (No-load torque) | | | $\leq 0.36Nm$ | | | |
| 容许最大轴向载荷 (Max. axial load) | 1350N | 润滑 (Lubrication) | | | 合成润滑脂 (Synthetic grease) | | | |
| 额定输入转速 (Nominal input speed) | 2000r/min | 使用环境温度 (Operation temperature) | | | $-15^{\circ}C \sim +90^{\circ}C$ | | | |
| 最大输入转速 (Max input speed) | 4000r/min | 使用寿命 (Service life) | | | $\geq 20000h$ | | | |
| 噪音 (Noise) | $\leq 70db$ | 防护等级 (Protection grade) | | | IP54 | | | |
| 回程间隙 (Backlash) | 8arcmin | | | | PW系列 | | | |
| | | | | | P2 L1 | | | |
| | | | | | Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn | | | |

未注线性尺寸极限偏差
Unmarked tolerance

| | |
|----------|-----------|
| 0.5-3 | ± 0.2 |
| 3-6 | ± 0.3 |
| 6-30 | ± 0.5 |
| 30-120 | ± 0.8 |
| 120-400 | ± 1.2 |
| 400-1000 | ± 2 |

精密行星减速机
Precision Planetary
Gear Boxes



PW140L1-i-K2-35-79-
114.3-200-M12

A. PW. 140.