

1

2

3

4

5





6

A

B

C


D

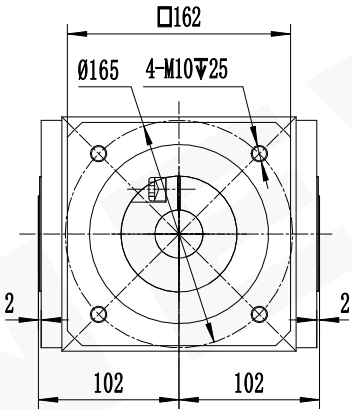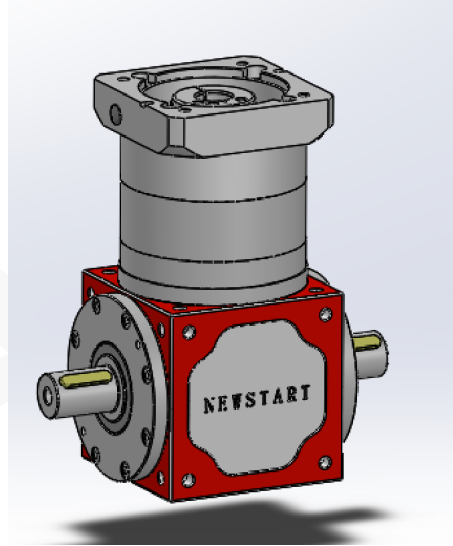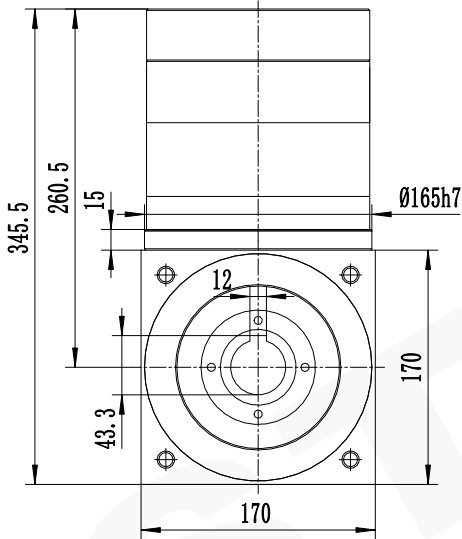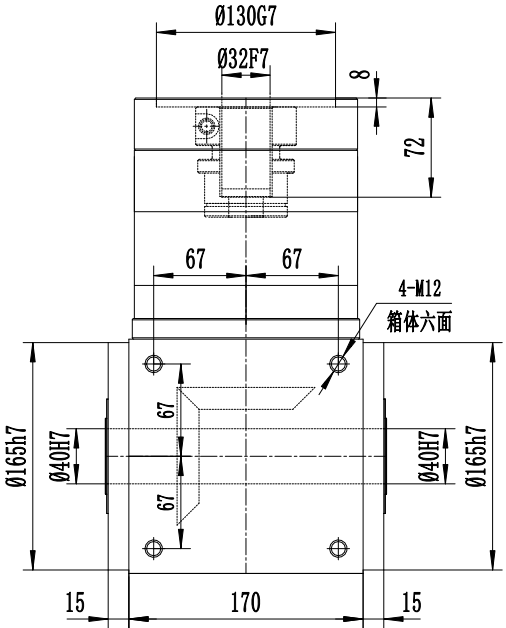

| | | | | | | | | |
|-----------------------------------|----|------|------|------|------|------|------|--|
| 减速比 (Ratio i) | | 3 | 4 | 5 | 6 | 8 | 10 | |
| 额定承载扭矩 (Rated load torque) | Nm | 585 | 585 | 585 | 585 | 585 | 544 | |
| 最大加速力矩 (Max. acceleration torque) | Nm | 878 | 878 | 878 | 878 | 878 | 816 | |
| 急停扭矩 (Emergency stop torque) | Nm | 1755 | 1755 | 1755 | 1755 | 1755 | 1632 | |

| | | | | | | | |
|------------------------------|-------------|--------------------------------|----------------------------------|--|--|--|--|
| 精密行星减速机技术参数 | | | | | | | |
| 容许最大径向载荷 (Max. radial load) | 3800N | 空载力矩20℃ (No-load torque) | $\leq 0.72Nm$ | | | | |
| 容许最大轴向载荷 (Max. axial load) | 1900N | 润滑 (Lubrication) | 合成润滑油 (Synthetic grease) | | | | |
| 额定输入转速 (Nominal input speed) | 1500r/min | 使用环境温度 (Operation temperature) | $-15^{\circ}C \sim +90^{\circ}C$ | | | | |
| 最大输入转速 (Max input speed) | 3000r/min | 使用寿命 (Service life) | $\geq 20000h$ | | | | |
| 噪音 (Noise) | $\leq 72db$ | 防护等级 (Protection grade) | IP54 | | | | |
| 回程间隙 (Backlash) | 8arcmin | PW系列 | Tel/ 电话: 0533-6288333 6288444 | | | | |
| | | P2 L1 | Fax/ 传真: 0533-6288411 | | | | |
| | | | Web/ 网址: www.newstart.cn | | | | |

| | |
|----------------------------------|-----------|
| 未注线性尺寸极限偏差 Unmarked tolerance | |
| 0.5-3 | ± 0.2 |
| 3-6 | ± 0.3 |
| 6-30 | ± 0.5 |
| 30-120 | ± 0.8 |
| 120-400 | ± 1.2 |
| 400-1000 | ± 2 |

| | |
|---|------|
| 精密行星减速机 Precision Planetary Gear Boxes | |
|  | |
| PW170L1-i-K2-32-58-130-165-M10 | |
| A. PW. | 170. |

1

2

3

4

5

6

A

B

C

D