

1

2

3

4

5





6


A

B

C

D

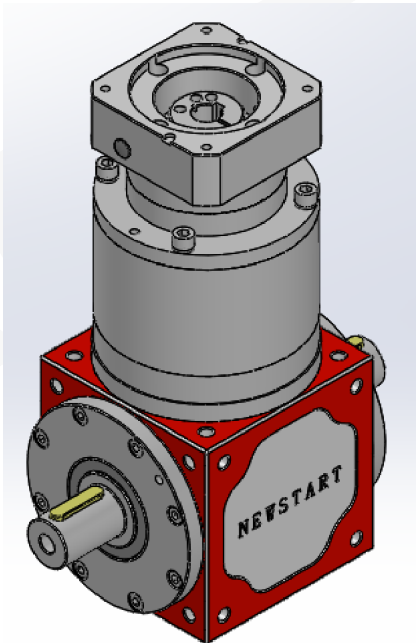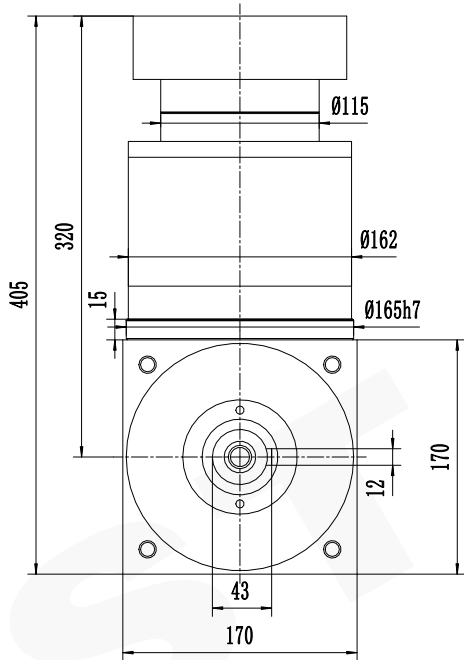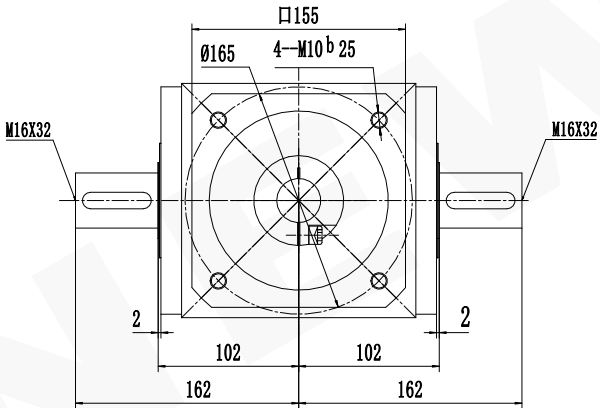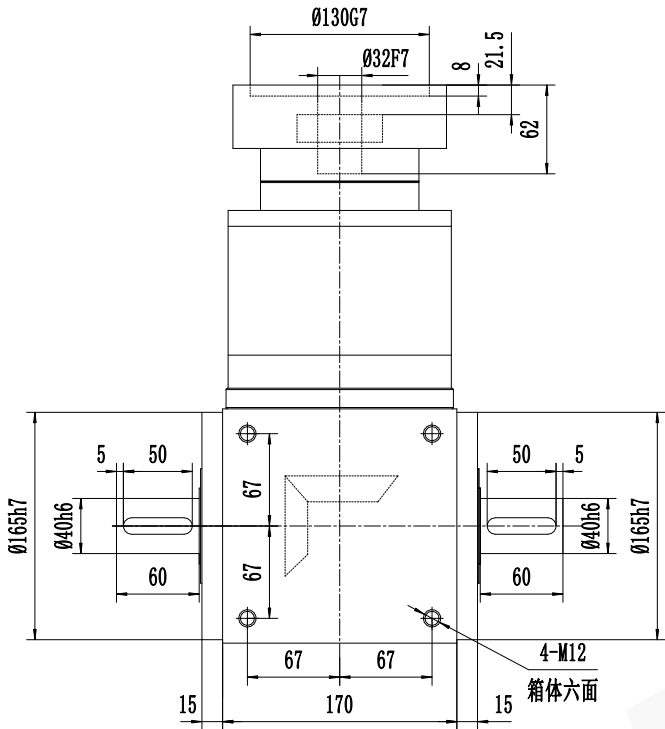

减速比 (Ratio i)		60	64	80	100	120	125	150	160	200	6-30	±0.5	
额定承载扭矩(Rated load torque)		Nm									585	30-120	±0.8
最大加速力矩 (Max. acceleration torque)		Nm									878	120-400	±1.2
急停扭矩 (Emergency stop toque)		Nm									1755	400-1000	±2
精密行星减速机技术参数											精密行星减速机 Precision Planetary Gear Boxes		
容许最大径向载荷 (Max. radial load)		3800N	空载力矩20℃ (No-load torque)				≤ 0.72Nm				 紐氏達特	PW170L3-i-S2-32-58-130-165-M10	
容许最大轴向载荷 (Max. axial load)		1900N	润滑 (Lubrication)				合成润滑油 (Synthetic grease)						
额定输入转速 (Nominal input speed)		1500r/min	使用环境温度 (Operation temperature)				-15℃~+90℃				A. P.W.	170.	
最大输入转速 (Max input speed)		3000r/min	使用寿命 (Service life)				≥20000h						
噪音 (Noise)		≤ 72db	防护等级 (Protection grade)				IP54						
回程间隙 (Backlash)		12arcmin				PW系列		Tel/电话: 0533-6288333 6288444					
						P2 L3		Fax/传真: 0533-6288411					
						Web/网址: www.newstart.cn							