

1

2

3

4

5




6


A

B

C

D

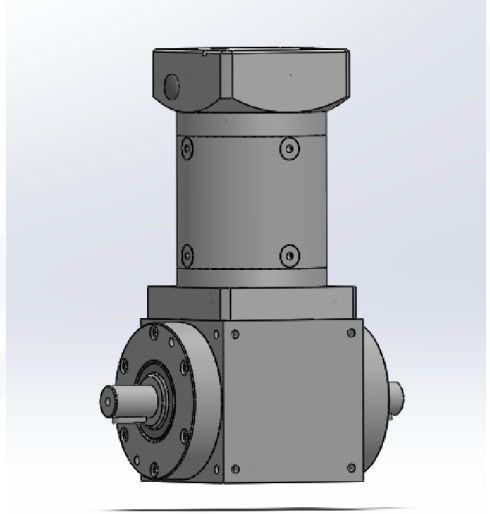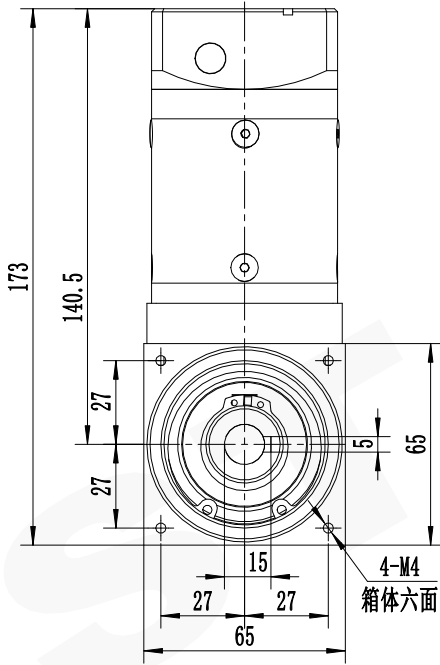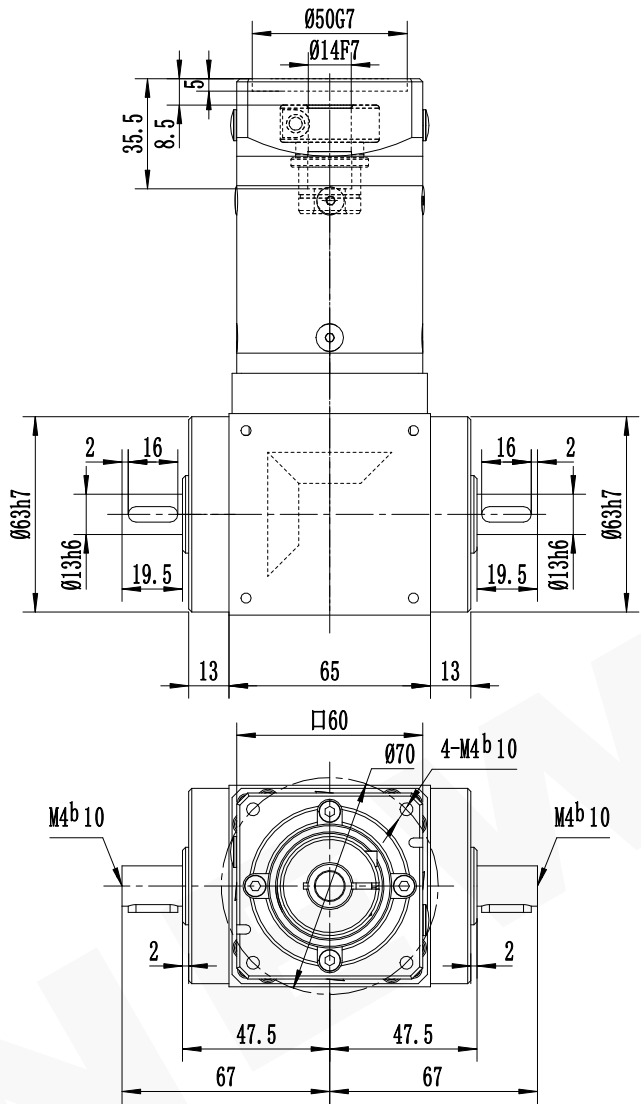

减速比 (Ratio i)		12	15	16	20	25	30	32	40	50	6-30	±0.5
额定承载扭矩 (Rated load torque)		Nm		25							30-120	±0.8
最大加速力矩 (Max.acceleration torque)		Nm		38							120-400	±1.2
急停扭矩 (Emergency stop torque)		Nm		75							400-1000	±2
精密行星减速机技术参数											精密行星减速机	
容许最大径向载荷 (Max.radial load)		700N	空载力矩20℃ (No-load torque)				≤ 0.1Nm				Precision Planetary Gear Boxes	
容许最大轴向载荷 (Max.axial load)		350N	润滑 (Lubrication)				合成润滑脂 (Synthetic grease)				 紐氏達特	
额定输入转速 (Nominal input speed)		3000r/min	使用环境温度 (Operation temperature)				-15℃~+90℃					
最大输入转速 (Max input speed)		6000r/min	使用寿命 (Service life)				≥20000h				PW65L1-i-S2-14-30-50-70-M4	
噪音 (Noise)		≤ 60db	防护等级 (Protection grade)				IP54				A. PW. 065.	
回程间隙 (Backlash)		8arcmin				PW系列		Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn				
						P2 L1						

1

2

3

4

5

6

A

B

C

D