

A

B

C





D


A

B

C

D

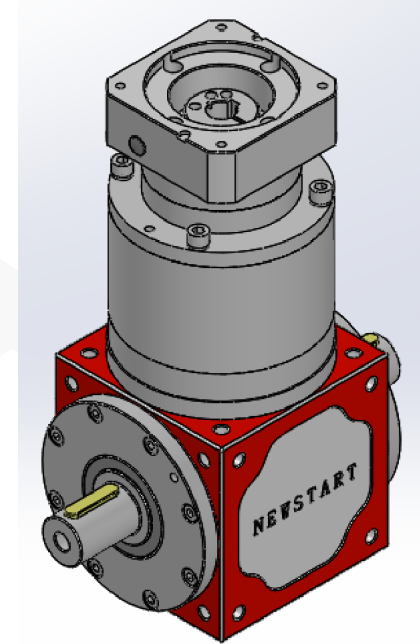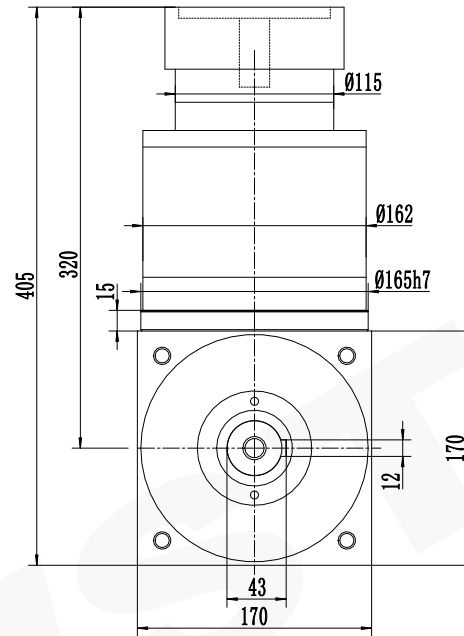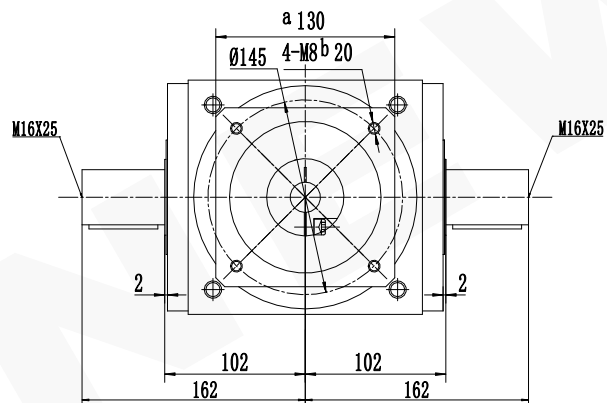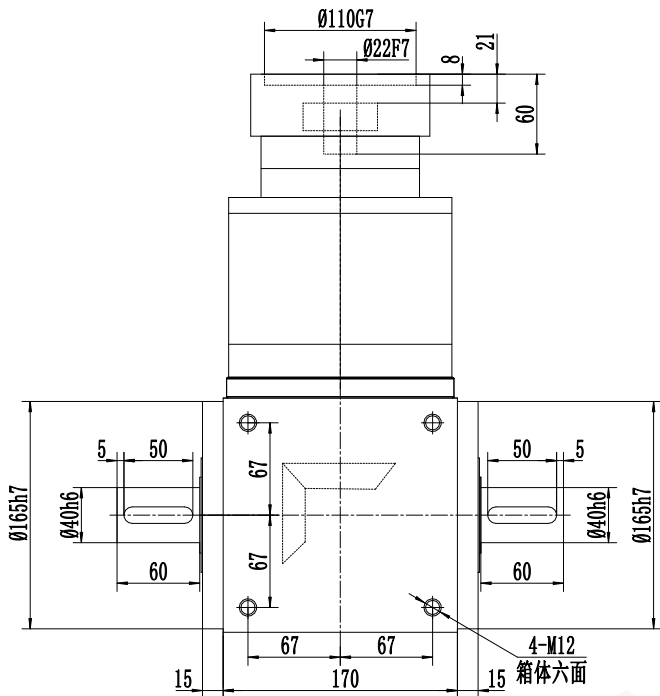

减速比 (Ratio i)		60	64	80	100	120	125	150	160	200	6-30	±0.5	
额定承载扭矩(Rated load torque)		Nm		585							30-120	±0.8	
最大加速力矩 (Max.acceleration torque)		Nm		878							120-400	±1.2	
急停扭矩 (Emergency stop toque)		Nm		1755							400-1000	±2	
精密行星减速机技术参数											精密行星减速机		
容许最大径向载荷 (Max.radial load)		3800N	空载力矩20℃(No-load torque)				≤ 0.72Nm				Precision Planetary Gear Boxes		
容许最大轴向载荷 (Max.axial load)		1900N	润滑(Lubrication)				合成润滑脂 (Synthetic grease)						
额定输入转速 (Nominal input speed)		1500r/min	使用环境温度(Operation temperature)				-15℃~+90℃				纽氏達特		
最大输入转速 (Max input speed)		3000r/min	使用寿命(Service life)				≥20000h				PW170L3-i-S2-22-58-110-145-M8		
噪音 (Noise)		≤ 72db	防护等级(Protection grade)				IP54						
回程间隙 (Backlash)		12arcmin				PW系列		Tel/电话: 0533-6288333 6288444				A. PW. 170.	
						P2 L3		Fax/传真: 0533-6288411					
								Web/网址: www.newstart.cn					