

1

2

3

4

5





6


A

B

C

D

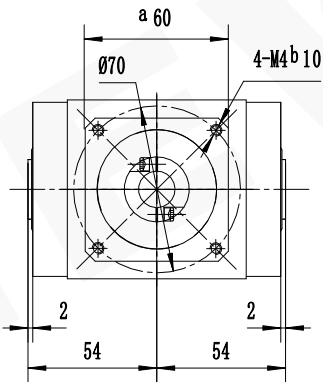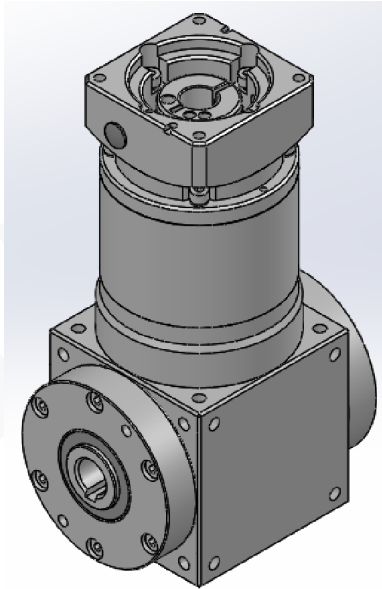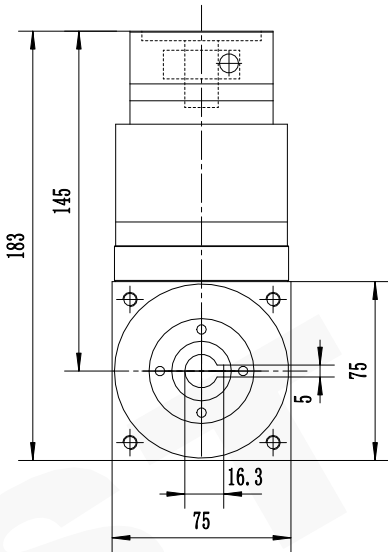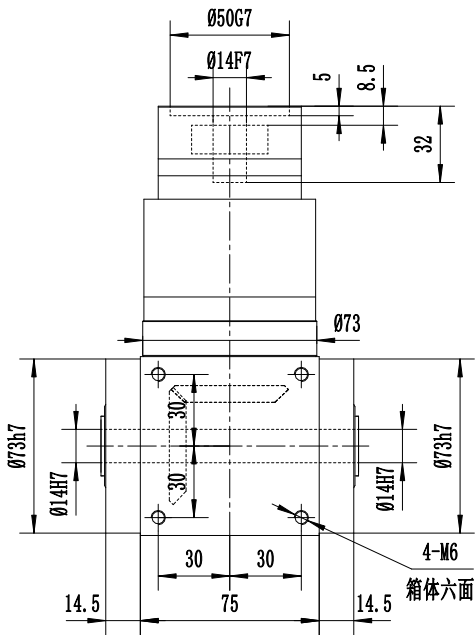

减速比 (Ratio i)		12	15	16	20	25	30	32	40	50	6-30	±0.5	
额定承载扭矩(Rated load torque) Nm		45									30-120	±0.8	
最大加速力矩 (Max.acceleration torque) Nm		68									120-400	±1.2	
急停扭矩 (Emergency stop toque) Nm		135									400-1000	±2	
精密行星减速机技术参数											精密行星减速机 Precision Planetary Gear Boxes		
容许最大径向载荷 (Max.radial load)		950N	空载力矩20℃(No-load torque)				≤ 0.1Nm					 紐氏達特	
容许最大轴向载荷 (Max.axial load)		425N	润滑(Lubrication)				合成润滑油 (Synthetic grease)						
额定输入转速 (Nominal input speed)		3000r/min	使用环境温度(Operation temperature)				-15℃~+90℃					PW75Li-i-K2-14-30- 50-70-M4	
最大输入转速 (Max input speed)		6000r/min	使用寿命(Service life)				≥20000h						
噪音 (Noise) ≤		63db	防护等级(Protection grade)				IP54					A. PW. 075.	
回程间隙 (Backlash)		10arcmin				PW系列		Tel/电话: 0533-6288333 6288444 Fax/传真: 0533-6288411 Web/网址: www.newstart.cn					
						P2 L2							

1

2

3

4

5

6

A

B

C

D