

A

B

C


D


A

B

C

D

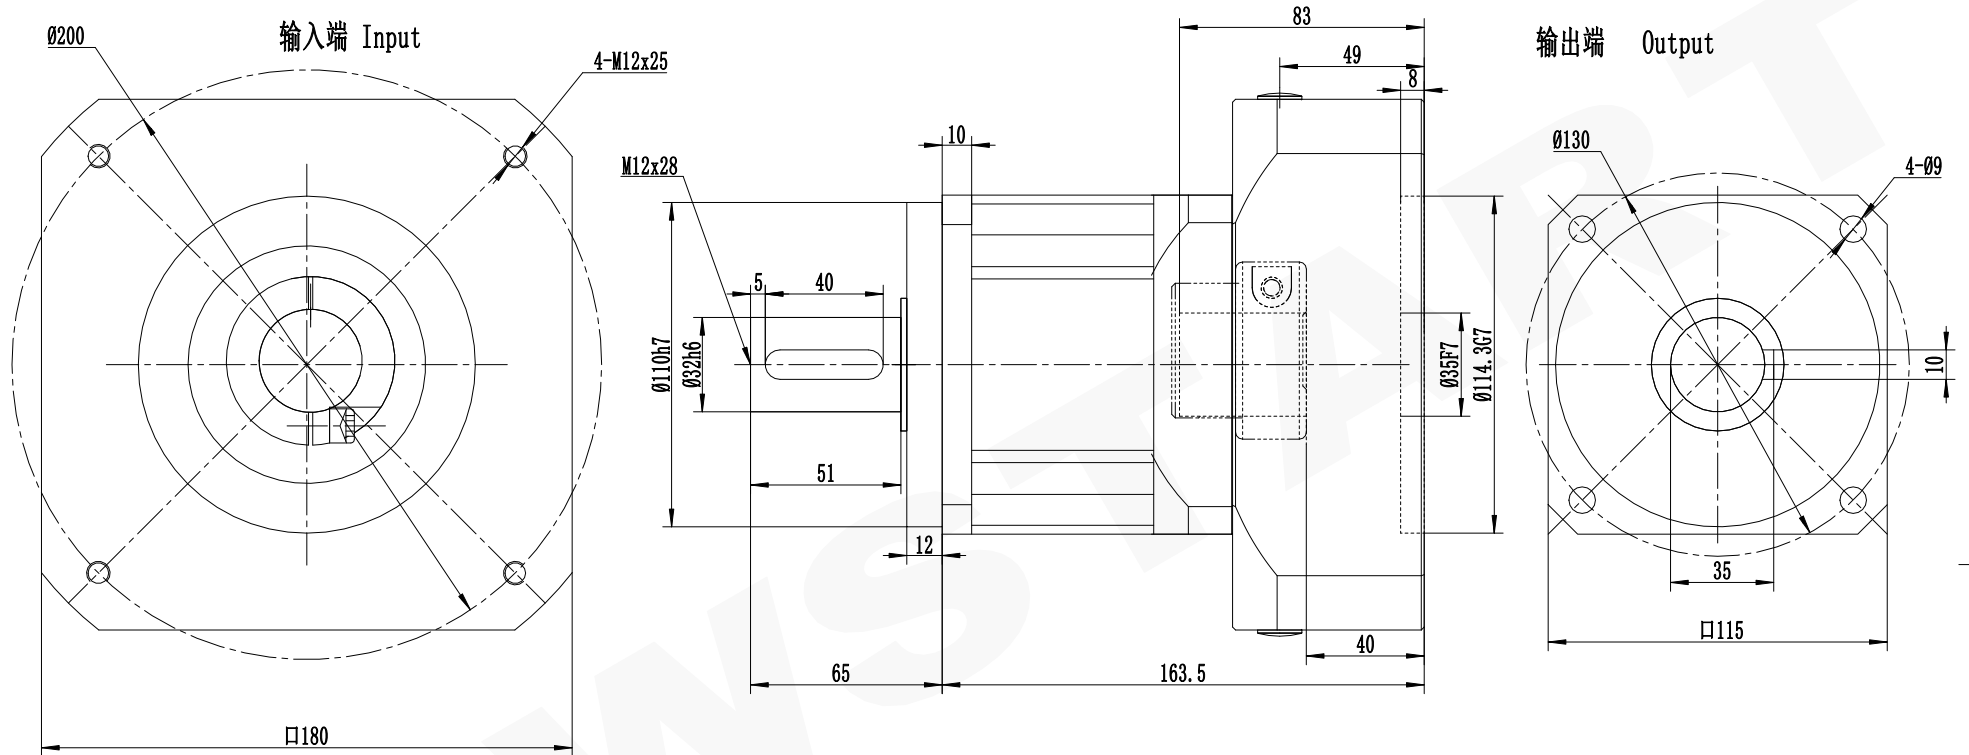

减速比 (Ratio i)	i	3	4	5	6	7	8	9	10	6-30	±0.5
额定承载扭矩(Rated load torque)	Nm	220	345	335	300	290	265	255	255	30-120	±0.8
最大加速力矩 (Max.acceleration torque)	Nm	396	621	603	540	522	477	459	459	120-400	±1.2
急停扭矩 (Emergency stop toque)	Nm	660	1035	1005	900	870	795	765	765	400-1000	±2
精密行星减速机技术参数										精密行星减速机	
容许最大径向载荷 (Max.radial load)	6700N	空载力矩20℃ (No-load torque)				≤ 0.36Nm					
容许最大轴向载荷 (Max.axial load)	3300N	润滑 (Lubrication)				合成润滑油 (Synthetic grease)					
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)				-15℃~+90℃				AB115L1-i-P2-S2 35-79-114.3-200-M12	
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)				≥20000h					
噪音 (Noise)	≤ 63db	防护等级 (Protection grade)				IP54				A. AB. 115.	
回程间隙 (Backlash)	5arcmin	AB系列				Tel/电话: 0533-6288333 6288444					
						P2 L1					