

1

2

3

4

5

6



A

B


C

D

输入端 Input

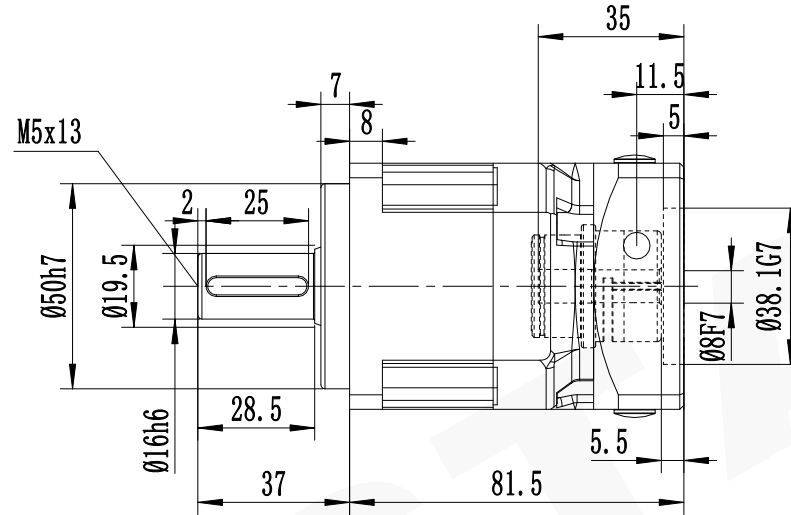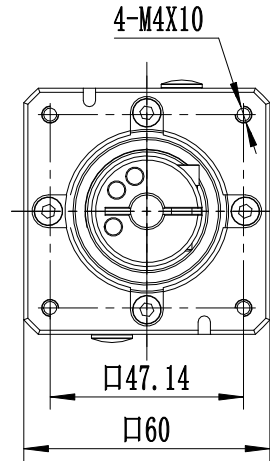

输出端 Output

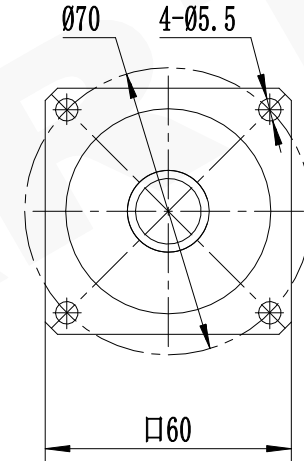

A

B

C

D

减速比 (Ratio i)	i	3	4	5	6	7	8	9	10	6-30	±0.5
额定承载扭矩 (Rated load torque)	Nm	55	65	60	52	50	45	42	42	30-120	±0.8
最大加速力矩 (Max. acceleration torque)	Nm	99	117	108	93.6	90	81	75.6	75.6	120-400	±1.2
急停扭矩 (Emergency stop torque)	Nm	165	195	180	156	150	135	126	126	400-1000	±2
精密行星减速机技术参数										精密行星减速机	
容许最大径向载荷 (Max. radial load)	1500N	空载力矩20℃ (No-load torque)					≤ 0.1Nm			 纽氏达特	
容许最大轴向载荷 (Max. axial load)	760N	润滑 (Lubrication)					合成润滑脂 (Synthetic grease)				
额定输入转速 (Nominal input speed)	3000r/min	使用环境温度 (Operation temperature)					-15℃~+90℃			AB042L1-i-P2-S2	
最大输入转速 (Max input speed)	6000r/min	使用寿命 (Service life)					≥20000h				
噪音 (Noise)	≤ 60db	防护等级 (Protection grade)					IP54			8-24-38.1-□47.14-M4	
回程间隙 (Backlash)	5arcmin	AB系列					Tel/电话: 0533-6288333 6288444				
							Fax/传真: 0533-6288411			A. AB. 060.	
							Web/网址: www.newstart.cn				

1

2

3

4

5

6